5 Power Supply Facilities

5.1 Power Module

5.2 Power Distribution Box

5.1 Power Module

5.1.1 ES02PSD16 (1600 W DC Power Module)

Overview

Table 5-1 Basic information about the ES02PSD16

Item	Details
Description	1600 W DC Power Module
Part Number	02310NKX
Model	ES02PSD16

Appearance



Figure 5-1 Appearance of the ES02PSD16


Version Mapping

Table 5-2 Mappings between ES02PSD16 and product models

Product	Product Model	First Supported Version	Limitations
S7700	S7703	V100R003C01	This power module uses a pass-through PIU, and must be configured with an external surge protection module and a voltage regulator module.

Product	Product Model	First Supported Version	Limitations
S7700	S7706	V100R003C01	This power module uses a pass-through PIU, and must be configured with an external surge protection module and a voltage regulator module.
S7700	S7712	V100R003C01	This power module uses a pass-through PIU, and must be configured with an external surge protection module and a voltage regulator module.

Figure 5-2 Panel of the ES02PSD16

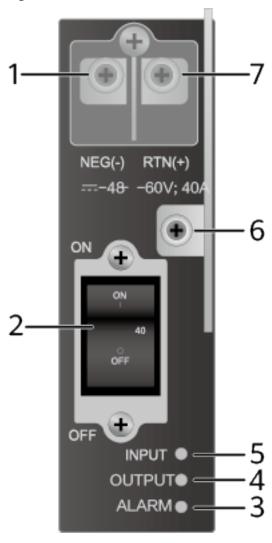

1. NEG terminal	2. Power switch	3. ALARM indicator
	 ON: The power module is supplying power. OFF: The power module is not supplying power. 	
4. OUTPUT indicator	5. INPUT indicator	6. Ejector lever
		NOTE
		Raise the ejector lever to release the power module from the slot, and lower the ejector lever to lock the power module in the slot.

7. RTN terminal	_	_
-----------------	---	---

Table 5-3 describes the relationship between cables and the terminals on a 1600 W DC power module.

Table 5-3 Relationship between cables and the terminals on a 1600 W DC power module

Input Terminal Identifier	Cable Type	Cable Color	Connected Terminal
RTN NOTE RTN indicates return.	Power ground cable	Black	OT bare crimp terminal
NEG	Power cable	Blue	

Table 5-4 Indicators on the ES02PSD16

Silkscreen	Name	Color	Status	Description
INPUT	INPUT indicator	-	Steady off	The power module receives no power input or its power cables are reversely connected.
		Green	Steady on	The input power is normal.
OUTPUT	OUTPUT indicator	-	Steady off	The power module provides no output power.
		Green	Steady on	The output power of the power module is in the normal range.

Silkscreen	Name	Color	Status	Description
ALARM	ALARM indicator	-	Steady off	The protection circuit is working properly.
		Red	Steady on	The protection circuit has failed.

A 1600 W DC power module provides a maximum of 1600 W power for the chassis and has the following functions:

- Short circuit protection
- Alarms about various power supply events, for example, no external power input, input undervoltage, and power switch off.
- The power module is hot swappable.

Technical Specifications

Table 5-5 Technical specifications of the ES02PSD16

Item	Specification
Dimensions without packaging (H x W x D) [mm(in.)]	130 mm x 41 mm x 393 mm (5.1 in. x 1.6 in. x 15.5 in.)
Weight without packaging [kg(lb)]	< 2.5 kg
Number of inputs	1
Rated input voltage [V]	-48 V DC to -60 V DC
Input voltage range [V]	-38.4 V DC to -72 V DC
Maximum input current [A]	40 A
Rated output voltage [V]	53.5 V DC
Rated output current [A]	40 A
Rated output power [W]	1600 W
Hot swapping	Supported

5.1.2 W2PSD2200 (2200 W DC Power Module (Black))

Overview

Table 5-6 Basic information about the W2PSD2200

Item	Details
Description	2200 W DC Power Module (Black)
Part Number	02270117
Model	W2PSD2200

Appearance

Figure 5-3 Appearance of the W2PSD2200




Version Mapping

Table 5-7 Mappings between W2PSD2200 and product models

Product	Product Model	First Supported Version	Limitations
S7700	S7703	V200R003C00	-
S7700	S7703 PoE	V200R013C00	-
S7700	S7706	V200R003C00	-
S7700	S7706 PoE	V200R013C00	-
S7700	S7712	V200R003C00	-

Figure 5-4 Panel of the W2PSD2200



1. NEG terminal	2. Power switch	3. FAULT indicator
	NOTE	
	 ON: The power module is supplying power. 	
	 OFF: The power module is not supplying power. 	

4. ALM indicator	5. RUN indicator	6. Ejector lever
		NOTE
		Raise the ejector lever to release the power module from the slot, and lower the ejector lever to lock the power module in the slot.
7. RTN terminal	-	-

Table 5-8 describes the relationship between cables and the terminals on a 2200 W DC power module.

Table 5-8 Relationship between cables and the terminals on a 2200 W DC power module

Input Terminal Identifier	Cable Type	Cable Color	Connected Terminal
RTN NOTE RTN indicates return.	Power ground cable	Black	OT bare crimp terminal
NEG	Power cable	Blue	

Table 5-9 Indicators on the W2PSD2200

Silkscreen	Name	Color	Status	Description
FAULT	FAULT indicator	Red	Steady on	The power module has a fault that cannot be rectified.

Silkscreen	Name	Color	Status	Description
ALM	ALM indicator	Yellow	Steady on	A power output shutdown alarm, overtemperat ure alarm, output overcurrent alarm, input overvoltage alarm, or input undervoltage alarm has been generated.
		Yellow	Blinking	Communicati on with the monitoring device (MCU or CMU) has been interrupted.
RUN	RUN indicator	Green	Steady on	The power input is normal.

A 2200 W DC power module provides a maximum power of 2200 W for the chassis. **Table 5-10** describes the functions of a 2200 W DC power module.

Table 5-10 Functions of a 2200 W DC power module

Function		Description	
Input protection	Input undervoltage protection	In this protection state, the power module is turned off and stops supplying power. When the system recovers from input undervoltage, the power module can automatically start supplying power again.	
	Input overcurrent protection	In this protection state, the power module is turned off and stops supplying power. The power module cannot automatically start supplying power again and needs to be replaced.	

Function		Description
Output protection	Output overvoltage protection	 In this protection state: If output overvoltage is caused by the power module itself, the power module stops supplying power. When the system recovers from output overvoltage, the power module cannot automatically start supplying power again. If output overvoltage is caused by increase of the input voltage received from the external power source, the power module stops supplying power. When the system recovers from output overvoltage, the power module can automatically start supplying power again.
	Output overcurrent protection	In this protection state, the output current is limited to a certain value. When the system recovers from output overcurrent, the power module can automatically start supplying power again.
	Output short- circuit protection	In this protection state, the power module supplies power intermittently, and the output current is limited to a range. When the system recovers from output short-circuit, the power module can automatically start supplying power again.
Overtemperature protection		When the temperature of the power module exceeds a specified threshold, the power module stops supplying power. When the temperature falls into the normal range, the power module automatically resumes power supply.
Hot swapping		The power module is hot swappable.

Technical Specifications

Table 5-11 Technical specifications of the W2PSD2200

Item	Specification
Dimensions without packaging (H x W x D) [mm(in.)]	130 mm x 41 mm x 393 mm (5.1 in. x 1.6 in. x 15.5 in.)
Weight without packaging [kg(lb)]	< 2.5 kg
Number of inputs	1

Item	Specification
Rated input voltage [V]	-48 V DC to -60 V DC
Input voltage range [V]	-40 V DC to -72 V DC
Maximum input current [A]	60 A
Rated output voltage [V]	53.5 V DC
Rated output current [A]	42 A
Rated output power [W]	2200 W
Power dissipation Mode	Heat dissipation with fan
Hot swapping	Supported

5.1.3 W2PSA0800 (800 W AC Power Module)

Overview

Table 5-12 Basic information about the W2PSA0800

Item	Details
Description	800 W AC Power Module
Part Number	02130979
Model	W2PSA0800

Appearance



Figure 5-5 Appearance of the W2PSA0800

Version Mapping

Table 5-13 Mappings between W2PSA0800 and product models

Product	Product Model	First Supported Version	Limitations
S7700	S7703	V100R003C01	-
S7700	S7703 PoE	V200R013C00	-
S7700	S7706	V100R003C01	-
S7700	S7706 PoE	V200R013C00	-
S7700	S7712	V100R003C01	-

Figure 5-6 Panel of the W2PSA0800



1. AC power socket	 2. Power switch NOTE ON: The power module is supplying power. OFF: The power module is not supplying power. 	3. FAULT indicator
4. ALM indicator	5. RUN indicator	6. Ejector lever NOTE Raise the ejector lever to release the power module from the slot, and lower the ejector lever to lock the power module in the slot.
7. Loose-proof pinch	-	-

Table 5-14 Indicators on the W2PSA0800

Silkscreen	Name	Color	Status	Description
FAULT	FAULT indicator	Red	Steady on	The power module has a fault that cannot be rectified.

Silkscreen	Name	Color	Status	Description
ALM	ALM indicator	Yellow	Steady on	A power output shutdown alarm, overtemperat ure alarm, output overcurrent alarm, input overvoltage alarm, or input undervoltage alarm has been generated.
		Yellow	Blinking	Communicati on with the monitoring device (MCU or CMU) has been interrupted.
RUN	RUN indicator	Green	Steady on	The power input is normal.

An 800 W AC power module provides a maximum power of 800 W for the chassis. **Table 5-15** describes the functions of an 800 W AC power module.

Table 5-15 Functions of an 800 W AC power module

Function		Description
Input protection	Input undervoltage protection	In this protection state, the power module is turned off and stops supplying power. When the system recovers from input undervoltage, the power module can automatically start supplying power again.

Function		Description	
	Input overcurrent protection	In this protection state, the power module is turned off and stops supplying power. The power module cannot automatically start supplying power again and needs to be replaced.	
Output protection	Output overvoltage protection	 In this protection state: If output overvoltage is caused by the power module itself, the power module stops supplying power. When the system recovers from output overvoltage, the power module cannot automatically start supplying power again. If output overvoltage is caused by increase of the input voltage received from the external power source, the power module stops supplying power. When the system recovers from output overvoltage, the power module can automatically start supplying power again. 	
	Output overcurrent protection	In this protection state, the output current is limited to a certain value. When the system recovers from output overcurrent, the power module can automatically start supplying power again.	
	Output short-circuit protection	In this protection state, the power module supplies power intermittently, and the output current is limited to a range. When the system recovers from output short-circuit, the power module can automatically start supplying power again.	

Function	Description
Overtemperature protection	When the temperature of the power module exceeds a specified threshold, the power module stops supplying power. When the temperature falls into the normal range, the power module automatically resumes power supply.
Hot swapping	The power module is hot swappable.

Technical Specifications

Table 5-16 Technical specifications of the W2PSA0800

Item	Specification
Dimensions without packaging (H x W x D) [mm(in.)]	130 mm x 41 mm x 393 mm (5.1 in. x 1.6 in. x 15.5 in.)
Weight without packaging [kg(lb)]	< 2.5 kg
Number of inputs	1
Rated input voltage [V]	220 V AC/110 V AC; 50/60 Hz
Input voltage range [V]	90 V AC to 290 V AC; 47 Hz to 63 Hz
Maximum input current [A]	5 A
Rated output voltage [V]	53.5 V DC
Rated output current [A]	15 A (220 V AC input)/7.5 A (110 V AC input)
Rated output power [W]	800 W (220 V AC input)/400 W (110 V AC input)
Power dissipation Mode	Heat dissipation with fan
Hot swapping	Supported

5.1.4 W2PSA2230 (2200 W AC Power Module)

Overview

Table 5-17 Basic information about the W2PSA2230

Item	Details
Description	2200 W AC Power Module
Part Number	02130977
Model	W2PSA2230

Appearance

Figure 5-7 Appearance of the W2PSA2230



Version Mapping


Table 5-18 Mappings between W2PSA2230 and product models

Product	Product Model	First Supported Version	Limitations
S7700	S7703	V100R006C00	-
S7700	S7703 PoE	V200R013C00	-
S7700	S7706	V100R006C00	-
S7700	S7706 PoE	V200R013C00	-
S7700	S7712	V100R006C00	-

□ NOTE

S7703, S7706 and S7712 chassis: In V100R006C00, this power module is supported only in the PoE power module slots. In V200R001C00 and later versions, this power module is supported in all the power module slots.

Figure 5-8 Panel of the W2PSA2230



1. Power socket	2. Power switch	3. FAULT indicator
	NOTE	
	ON: The power module is supplying power.	
	 OFF: The power module is not supplying power. 	

4. ALM indicator	5. RUN indicator	6. Ejector lever	
		NOTE Raise the ejector lever to release the power module from the slot, and lower the ejector lever to lock the power module in the slot.	

Table 5-19 Indicators on the W2PSA2230

Silkscreen	Name	Color	Status	Description
FAULT	FAULT indicator	Red	Steady on	The power module has a fault that cannot be rectified.
ALM	ALM indicator	Yellow	Steady on	A power output shutdown alarm, overtemperat ure alarm, output overcurrent alarm, input overvoltage alarm, or input undervoltage alarm has been generated.
		Yellow	Blinking	Communicati on with the monitoring device (MCU or CMU) has been interrupted.
RUN	RUN indicator	Green	Steady on	The power input is normal.

A 2200 W AC power module provides a maximum power of 2200 W for the chassis. **Table 5-20** describes the functions of a 2200 W AC power module.

Table 5-20 Functions of a 2200 W AC power module

Function		Description
Input protection	Input undervoltage protection	In this protection state, the power module is turned off and stops supplying power. When the system recovers from input undervoltage, the power module can automatically start supplying power again.
	Input overcurrent protection	In this protection state, the power module is turned off and stops supplying power. The power module cannot automatically start supplying power again and needs to be replaced.
Output	Output	In this protection state:
protection	overvoltage protection	 If output overvoltage is caused by the power module itself, the power module stops supplying power. When the system recovers from output overvoltage, the power module cannot automatically start supplying power again.
		If output overvoltage is caused by increase of the input voltage received from the external power source, the power module stops supplying power. When the system recovers from output overvoltage, the power module can automatically start supplying power again.
	Output overcurrent protection	In this protection state, the output current is limited to a certain value. When the system recovers from output overcurrent, the power module can automatically start supplying power again.
	Output short- circuit protection	In this protection state, the power module supplies power intermittently, and the output current is limited to a range. When the system recovers from output short-circuit, the power module can automatically start supplying power again.
Overtemperature protection		When the temperature of the power module exceeds a specified threshold, the power module stops supplying power. When the temperature falls into the normal range, the power module automatically resumes power supply.
Hot swapping		The power module is hot swappable.

Technical Specifications

Table 5-21 Technical specifications of the W2PSA2230

Item	Specification	
Dimensions without packaging (H x W x D) [mm(in.)]	130 mm x 41 mm x 393 mm (5.1 in. x 1.6 in. x 15.5 in.)	
Weight without packaging [kg(lb)]	< 2.5 kg	
Number of inputs	1	
Rated input voltage [V]	220 V AC/110 V AC; 50/60 Hz	
Input voltage range [V]	90 V AC to 290 V AC; 47 Hz to 63 Hz	
Maximum input current [A]	15.5 A	
Rated output voltage [V]	53.5 V DC	
Rated output current [A]	42 A (220 V AC input)/21 A (110 V AC input)	
Rated output power [W]	2200 W (220 V AC input)/1100 W (110 V AC input)	
Power dissipation Mode	Heat dissipation with fan	
Hot swapping	Supported	

5.1.5 PAC-2200WF (2200 W AC Power Module)

Overview

Table 5-22 Basic information about the PAC-2200WF

Item	Details
Description	2200 W AC Power Module
Part Number	02131120
Model	PAC-2200WF

□ NOTE

PAC-2200WF has replaced W2PSA2230 since Feb, 2015.

Appearance



Figure 5-9 Appearance of the PAC-2200WF

Version Mapping


Table 5-23 Mappings between PAC-2200WF and product models

Product	Product Model	First Supported Version	Limitations
S7700	S7703	V100R006C00	-
S7700	S7703 PoE	V200R013C00	-
S7700	S7706	V100R006C00	-
S7700	S7706 PoE	V200R013C00	-
S7700	S7712	V100R006C00	-

□ NOTE

S7703, S7706 and S7712 chassis: In V100R006C00 and V200R001C00, this power module is supported only in the PoE power module slots. In V200R002C00 and later versions, this power module is supported in all the power module slots.

Figure 5-10 Panel of the PAC-2200WF



1. Power switch	2. Ejector lever	3. Power socket
When the power switch is turned ON, the power module supplies power to the chassis. When the power switch is turned OFF, the power module does not supply power to the chassis.	NOTE Raise the ejector lever to release the power module from the slot, and lower the ejector lever to lock the power module in the slot.	
4. ALARM indicator	5. OUTPUT indicator	6. INPUT indicator

Table 5-24 Indicators on the PAC-2200WF

Silkscreen	Name	Color	Status	Description
INPUT INPUT indicator	-	Steady off	The power module receives no input power.	
		Green	Steady on	The input power of the power module is in the normal range.

Silkscreen	Name	Color	Status	Description
		Green	Blinking	The power module is in an input undervoltage or input overvoltage condition.
ОИТРИТ	OUTPUT indicator	-	Steady off	The power module provides no output power.
		Green	Steady on	The output power of the power module is in the normal range.
ALARM	ALARM indicator	-	Steady off	The power module is working normally.
		Red	Steady on	The power module is experiencing overheating, external short circuit, output overvoltage, output overcurrent, or a fan failure.
		Red	Blinking	Communicati on between the power module and CMU has been interrupted.

A 2200 W AC power module provides a maximum power of 2200 W for the chassis. **Table 5-25** describes the functions of a 2200 W AC power module.

Table 5-25 Functions of a 2200 W AC power module

Function		Description
Input protection	Input undervoltage protection	In this protection state, the power module is turned off and stops supplying power. When the system recovers from input undervoltage, the power module can automatically start supplying power again.
	Input overcurrent protection	In this protection state, the power module is turned off and stops supplying power. The power module cannot automatically start supplying power again and needs to be replaced.
Output	Output	In this protection state:
protection	overvoltage protection	 If output overvoltage is caused by the power module itself, the power module stops supplying power. When the system recovers from output overvoltage, the power module cannot automatically start supplying power again.
		If output overvoltage is caused by increase of the input voltage received from the external power source, the power module stops supplying power. When the system recovers from output overvoltage, the power module can automatically start supplying power again.
	Output overcurrent protection	In this protection state, the output current is limited to a certain value. When the system recovers from output overcurrent, the power module can automatically start supplying power again.
	Output short- circuit protection	In this protection state, the power module supplies power intermittently, and the output current is limited to a range. When the system recovers from output short-circuit, the power module can automatically start supplying power again.
Overtemperat	ture protection	When the temperature of the power module exceeds a specified threshold, the power module stops supplying power. When the temperature falls into the normal range, the power module automatically resumes power supply.
Hot swapping		The power module is hot swappable.

□ NOTE

Do not insert the power cable locking strap into an air vent on the power module panel, as this will affect operations of the power module.

Technical Specifications

Table 5-26 Technical specifications of the PAC-2200WF

Item	Specification
Dimensions without packaging (H x W x D) [mm(in.)]	130 mm x 41 mm x 393 mm (5.1 in. x 1.6 in. x 15.5 in.)
Weight without packaging [kg(lb)]	< 2.5 kg
Number of inputs	1
Rated input voltage [V]	220 V AC/110 V AC; 50/60 Hz
Input voltage range [V]	90 V AC to 290 V AC; 47 Hz to 63 Hz
Maximum input current [A]	15.5 A
Rated output voltage [V]	53.5 V DC
Rated output current [A]	42 A (220 V AC input)/21 A (110 V AC input)
Rated output power [W]	2200 W (220 V AC input)/1100 W (110 V AC input)
Power dissipation Mode	Heat dissipation with fan
Hot swapping	Supported

5.1.6 PAC3KS54-CB (3000 W AC Power Module (Black))

Overview

Table 5-27 Basic information about the PAC3KS54-CB

Item	Details
Description	3000 W AC Power Module (Black)
Part Number	02311XYE
Model	PAC3KS54-CB

□ NOTE

PAC3KS54-CB has been replaced by PAC3KS54-CE and PAC3KS54-NE.

Appearance

Figure 5-11 Appearance of the PAC3KS54-CB




Version Mapping

Table 5-28 Mappings between PAC3KS54-CB and product models

Product	Product Model	First Supported Version	Limitations
S7700	S7703	V200R012C00	-
S7700	S7703 PoE	V200R013C00	-
S7700	S7706	V200R012C00	-
S7700	S7706 PoE	V200R013C00	-
S7700	S7712	V200R012C00	-

Figure 5-12 Panel of the PAC3KS54-CB



 Power switch When the power switch is turned ON, the power module supplies power to the chassis. When the power switch is turned OFF, the power module does not supply power to the chassis. 	2. Ejector lever NOTE Raise the ejector lever to release the power module from the slot, and lower the ejector lever to lock the power module in the slot.	3. Power socket
4. ALARM indicator	5. OUTPUT indicator	6. INPUT indicator

Table 5-29 Indicators on the PAC3KS54-CB

Silkscreen	Name	Color	Status	Description
INPUT INPUT indicator	-	Steady off	The power module receives no input power.	
		Green	Steady on	The input power of the power module is in the normal range.

Silkscreen	Name	Color	Status	Description
		Green	Blinking	The power module is in an input undervoltage or input overvoltage condition.
OUTPUT	OUTPUT indicator	-	Steady off	The power module provides no output power.
		Green	Steady on	The output power of the power module is in the normal range.
ALARM	ALARM indicator	-	Steady off	The power module is working normally.
		Red	Steady on	The power module is experiencing overheating, external short circuit, output overvoltage, output overcurrent, or a fan failure.
		Red	Blinking	Communicati on between the power module and CMU has been interrupted.

A 3000 W AC power module provides a maximum power of 3000 W for the chassis. **Table 5-30** describes the functions of a 3000 W AC power module.

Table 5-30 Functions of a 3000 W AC power module

Function		Description		
Input protection	Input overvoltage protection	In this protection state, the power module is turned off and stops supplying power. When the system recovers from input overvoltage, the power module can automatically start supplying power again.		
	Input undervoltage protection	In this protection state, the power module is turned off and stops supplying power. When the system recovers from input undervoltage, the power module can automatically start supplying power again.		
	Input overcurrent protection	In this protection state, the power module is turned off and stops supplying power. The power module cannot automatically start supplying power again and needs to be replaced.		
Output protection	Output overvoltage protection	 In this protection state: If output overvoltage is caused by the power module itself, the power module stops supplying power. When the system recovers from output overvoltage, the power module cannot automatically start supplying power again. If output overvoltage is caused by increase of the input voltage received from the external power source, the power module stops supplying power. When the system recovers from output overvoltage, the power module can automatically start supplying power again. 		
	Output overcurrent protection	In this protection state, the output current is limited to a certain value. When the system recovers from output overcurrent, the power module can automatically start supplying power again.		
	Output short- circuit protection	In this protection state, the power module supplies power intermittently, and the output current is limited to a range. When the system recovers from output short-circuit, the power module can automatically start supplying power again.		

Function	Description
Overtemperature protection	When the temperature of the power module exceeds a specified threshold, the power module stops supplying power. When the temperature falls into the normal range, the power module automatically resumes power supply.
Hot swapping	The power module is hot swappable.

Do not insert the power cable locking strap into an air vent on the power module panel, as this will affect operations of the power module.

When the power module is used in the following chassis, its maximum output power is 2200 W:

- S7703 chassis running a version between V200R002C00 and V200R011C10 (used in a system power slot)
- S7703 chassis running a version between V100R006C00 and V200R011C10 (used in the PoE power slot)
- S7706 chassis running a version between V200R002C00 and V200R011C10 (used in a system power slot)
- S7706 chassis running a version between V100R006C00 and V200R011C10 (used in a PoE power slot)
- S7712 chassis running a version between V200R002C00 and V200R011C10 (used in a system power slot)
- S7712 chassis running a version between V100R006C00 and V200R011C10 (used in a PoE power slot)

Technical Specifications

Table 5-31 Technical specifications of the PAC3KS54-CB

Item	Specification
Dimensions without packaging (H x W x D) [mm(in.)]	130 mm x 41 mm x 417.4 mm (5.1 in. x 1.6 in. x 16.4 in.)
Weight without packaging [kg(lb)]	< 3 kg
Number of inputs	1
Rated input voltage [V]	220 V AC/110 V AC; 50/60 Hz 240 V DC

Item	Specification
Input voltage range [V]	90 V AC to 290 V AC; 47 Hz to 63 Hz
	190 V DC to 290 V DC The maximum current of the power cable used by the 3000 W AC power module is 16 A. When the 220 V input is used, the minimum voltage cannot be lower than 200 V. When the 110 V input is used, the minimum voltage cannot be lower than 100 V.
Maximum input current [A]	AC input: 16 A
	High-voltage DC input: 14 A
Rated output voltage [V]	53.5 V DC
Rated output current [A]	56.1 A (220 V AC input or 240 V DC)/ 28.1 A (110 V AC Input)
Rated output power [W]	3000 W (220 V AC input or 240 V DC)/ 1500 W (110 V AC input)
Power dissipation Mode	Heat dissipation with fan
Hot swapping	Supported

5.1.7 PAC3KS54-CE (02312FFP: 3000 W AC Power Module (Black))

Overview

Table 5-32 Basic information about the PAC3KS54-CE

Item	Details
Description	3000 W AC Power Module (Black)
Part Number	02312FFP
Model	PAC3KS54-CE

Appearance




Figure 5-13 Appearance of the PAC3KS54-CE

Version Mapping

Table 5-33 Mappings between PAC3KS54-CE and product models

Product	Product Model	First Supported Version	Limitations
S7700	S7703	V200R013C02	-
S7700	S7703 PoE	V200R019C00	-
S7700	S7706	V200R013C02	-
S7700	S7706 PoE	V200R019C00	-
S7700	S7712	V200R013C02	-

Figure 5-14 Panel of the PAC3KS54-CE



1. Power switch	2. Ejector lever	3. Power socket
When the power switch is turned ON, the power module supplies power to the chassis. When the power switch is turned OFF, the power module does not supply power to the chassis.	NOTE Raise the ejector lever to release the power module from the slot, and lower the ejector lever to lock the power module in the slot.	
4. ALARM indicator	5. OUTPUT indicator	6. INPUT indicator

Table 5-34 Indicators on the PAC3KS54-CE

Silkscreen	Name	Color	Status	Description
INPUT	INPUT indicator	-	Steady off	The power module receives no input power.
		Green	Steady on	The input power of the power module is in the normal range.

Silkscreen	Name	Color	Status	Description
		Green	Blinking	The power module is in an input undervoltage or input overvoltage condition.
OUTPUT	OUTPUT indicator	-	Steady off	The power module provides no output power.
		Green	Steady on	The output power of the power module is in the normal range.
ALARM	ALARM indicator	-	Steady off	The power module is working normally.
		Red	Steady on	The power module is experiencing overheating, external short circuit, output overvoltage, output overcurrent, or a fan failure.
		Red	Blinking	Communicati on between the power module and CMU has been interrupted.

A 3000 W AC power module provides a maximum power of 3000 W for the chassis. **Table 5-35** describes the functions of a 3000 W AC power module.

Table 5-35 Functions of a 3000 W AC power module

Function		Description
Input protection	Input overvoltage protection	In this protection state, the power module is turned off and stops supplying power. When the system recovers from input overvoltage, the power module can automatically start supplying power again.
	Input undervoltage protection	In this protection state, the power module is turned off and stops supplying power. When the system recovers from input undervoltage, the power module can automatically start supplying power again.
	Input overcurrent protection	In this protection state, the power module is turned off and stops supplying power. The power module cannot automatically start supplying power again and needs to be replaced.
Output protection	Output overvoltage protection	 In this protection state: If output overvoltage is caused by the power module itself, the power module stops supplying power. When the system recovers from output overvoltage, the power module cannot automatically start supplying power again. If output overvoltage is caused by increase of the input voltage received from the external power source, the power module stops supplying power. When the system recovers from output overvoltage, the power module can automatically start supplying power again.
	Output overcurrent protection	In this protection state, the output current is limited to a certain value. When the system recovers from output overcurrent, the power module can automatically start supplying power again.
	Output short- circuit protection	In this protection state, the power module supplies power intermittently, and the output current is limited to a range. When the system recovers from output short-circuit, the power module can automatically start supplying power again.

Function	Description
Overtemperature protection	When the temperature of the power module exceeds a specified threshold, the power module stops supplying power. When the temperature falls into the normal range, the power module automatically resumes power supply.
Hot swapping	The power module is hot swappable.

Do not insert the power cable locking strap into an air vent on the power module panel, as this will affect operations of the power module.

When the power module is used in the following chassis, its maximum output power is 2200 W:

- S7703 chassis running a version between V200R002C00 and V200R011C10 (used in a system power slot)
- S7703 chassis running a version between V100R006C00 and V200R011C10 (used in the PoE power slot)
- S7706 chassis running a version between V200R002C00 and V200R011C10 (used in a system power slot)
- S7706 chassis running a version between V100R006C00 and V200R011C10 (used in a PoE power slot)
- S7712 chassis running a version between V200R002C00 and V200R011C10 (used in a system power slot)
- S7712 chassis running a version between V100R006C00 and V200R011C10 (used in a PoE power slot)

Technical Specifications

Table 5-36 Technical specifications of the PAC3KS54-CE

Item	Specification
Dimensions without packaging (H x W x D) [mm(in.)]	130 mm x 41 mm x 417.4 mm (5.1 in. x 1.6 in. x 16.4 in.)
Weight without packaging [kg(lb)]	< 3 kg
Number of inputs	1
Rated input voltage [V]	220 V AC/110 V AC; 50/60 Hz 240 V DC

Item	Specification
Input voltage range [V]	90 V AC to 290 V AC; 47 Hz to 63 Hz
	190 V DC to 290 V DC The maximum current of the power cable used by the 3000 W AC power module is 16 A. When the 220 V input is used, the minimum voltage cannot be lower than 200 V. When the 110 V input is used, the minimum voltage cannot be lower than 100 V.
Maximum input current [A]	AC input: 16 A
	High-voltage DC input: 14 A
Rated output voltage [V]	53.5 V DC
Rated output current [A]	56.1 A (220 V AC input or 240 V DC)/ 28.1 A (110 V AC Input)
Rated output power [W]	3000 W (220 V AC input or 240 V DC)/ 1500 W (110 V AC input)
Power dissipation Mode	Heat dissipation with fan
Hot swapping	Supported

5.1.8 PAC3KS54-CE (02312FFP-001: 3000 W AC Power Module (Black))

Overview

Table 5-37 Basic information about the PAC3KS54-CE

Item	Details
Description	3000 W AC Power Module (Black)
Part Number	02312FFP-001
Model	PAC3KS54-CE

Appearance



Figure 5-15 Appearance of the PAC3KS54-CE


Version Mapping

Table 5-38 Mappings between PAC3KS54-CE and product models

Product	Product Model	First Supported Version	Limitations
S7700	S7703	V200R013C02	-
S7700	S7703 PoE	V200R019C00	-
S7700	S7706	V200R013C02	-
S7700	S7706 PoE	V200R019C00	-
S7700	S7712	V200R013C02	-

Panel

Figure 5-16 Panel of the PAC3KS54-CE



 Power switch When the power switch is turned ON, the power module supplies power to the chassis. When the power switch is turned OFF, the power module does not supply power to the chassis. 	2. Ejector lever NOTE Raise the ejector lever to release the power module from the slot, and lower the ejector lever to lock the power module in the slot.	3. Power socket
4. ALARM indicator	5. OUTPUT indicator	6. INPUT indicator

Table 5-39 Indicators on the PAC3KS54-CE

Silkscreen	Name	Color	Status	Description
INPUT	INPUT indicator	-	Steady off	The power module receives no input power.
		Green	Steady on	The input power of the power module is in the normal range.

Silkscreen	Name	Color	Status	Description
		Green	Blinking	The power module is in an input undervoltage or input overvoltage condition.
OUTPUT	OUTPUT indicator	-	Steady off	The power module provides no output power.
		Green	Steady on	The output power of the power module is in the normal range.
ALARM	ALARM indicator	-	Steady off	The power module is working normally.
		Red	Steady on	The power module is experiencing overheating, external short circuit, output overvoltage, output overcurrent, or a fan failure.
		Red	Blinking	Communicati on between the power module and CMU has been interrupted.

Functions and Features

A 3000 W AC power module provides a maximum power of 3000 W for the chassis. **Table 5-40** describes the functions of a 3000 W AC power module.

Table 5-40 Functions of a 3000 W AC power module

Function		Description
Input Input overvoltage protection		In this protection state, the power module is turned off and stops supplying power. When the system recovers from input overvoltage, the power module can automatically start supplying power again.
	Input undervoltage protection	In this protection state, the power module is turned off and stops supplying power. When the system recovers from input undervoltage, the power module can automatically start supplying power again.
	Input overcurrent protection	In this protection state, the power module is turned off and stops supplying power. The power module cannot automatically start supplying power again and needs to be replaced.
Output protection	Output overvoltage protection	 In this protection state: If output overvoltage is caused by the power module itself, the power module stops supplying power. When the system recovers from output overvoltage, the power module cannot automatically start supplying power again. If output overvoltage is caused by increase of the input voltage received from the external power source, the power module stops supplying power. When the system recovers from output overvoltage, the
	Output overcurrent protection	power module can automatically start supplying power again. In this protection state, the output current is limited to a certain value. When the system recovers from output overcurrent, the power module can automatically start supplying power again.
	Output short- circuit protection	In this protection state, the power module supplies power intermittently, and the output current is limited to a range. When the system recovers from output short-circuit, the power module can automatically start supplying power again.

Function	Description
Overtemperature protection	When the temperature of the power module exceeds a specified threshold, the power module stops supplying power. When the temperature falls into the normal range, the power module automatically resumes power supply.
Hot swapping	The power module is hot swappable.

□ NOTE

Do not insert the power cable locking strap into an air vent on the power module panel, as this will affect operations of the power module.

When the power module is used in the following chassis, its maximum output power is 2200 W:

- S7703 chassis running a version between V200R002C00 and V200R011C10 (used in a system power slot)
- S7703 chassis running a version between V100R006C00 and V200R011C10 (used in the PoE power slot)
- S7706 chassis running a version between V200R002C00 and V200R011C10 (used in a system power slot)
- S7706 chassis running a version between V100R006C00 and V200R011C10 (used in a PoE power slot)
- S7712 chassis running a version between V200R002C00 and V200R011C10 (used in a system power slot)
- S7712 chassis running a version between V100R006C00 and V200R011C10 (used in a PoE power slot)

Technical Specifications

Table 5-41 Technical specifications of the PAC3KS54-CE

Item	Specification
Dimensions without packaging (H x W x D) [mm(in.)]	130 mm x 41 mm x 417.4 mm (5.1 in. x 1.6 in. x 16.4 in.)
Weight without packaging [kg(lb)]	< 3 kg
Number of inputs	1
Rated input voltage [V]	220 V AC/110 V AC; 50/60 Hz 240 V DC

Item	Specification
Input voltage range [V]	90 V AC to 290 V AC; 47 Hz to 63 Hz
	190 V DC to 290 V DC The maximum current of the power cable used by the 3000 W AC power module is 16 A. When the 220 V input is used, the minimum voltage cannot be lower than 200 V. When the 110 V input is used, the minimum voltage cannot be lower than 100 V.
Maximum input current [A]	AC input: 16 A
	High-voltage DC input: 14 A
Rated output voltage [V]	53.5 V DC
Rated output current [A]	56.1 A (220 V AC input or 240 V DC)/ 28.1 A (110 V AC Input)
Rated output power [W]	3000 W (220 V AC input or 240 V DC)/ 1500 W (110 V AC input)
Power dissipation Mode	Heat dissipation with fan
Hot swapping	Supported

5.1.9 PAC3KS54-NE (3000 W AC Power Module (Black))

Overview

Table 5-42 Basic information about the PAC3KS54-NE

Item	Details
Description	3000 W AC Power Module (Black)
Part Number	02131712
Model	PAC3KS54-NE

Appearance



Figure 5-17 Appearance of the PAC3KS54-NE


Version Mapping

Table 5-43 Mappings between PAC3KS54-NE and product models

Product	Product Model	First Supported Version	Limitations
S7700	S7703	V200R013C02	-
S7700	S7703 PoE	V200R019C00	-
S7700	S7706	V200R013C02	-
S7700	S7706 PoE	V200R019C00	-
S7700	S7712	V200R013C02	-

Panel

Figure 5-18 Panel of the PAC3KS54-NE



1. Power switch	2. Ejector lever	3. Power socket
When the power switch is turned ON, the power module supplies power to the chassis. When the power switch is turned OFF, the power module does not supply power to the chassis.	NOTE Raise the ejector lever to release the power module from the slot, and lower the ejector lever to lock the power module in the slot.	
4. ALARM indicator	5. OUTPUT indicator	6. INPUT indicator

Table 5-44 Indicators on the PAC3KS54-NE

Silkscreen	Name	Color	Status	Description
INPUT	INPUT indicator	-	Steady off	The power module receives no input power.
		Green	Steady on	The input power of the power module is in the normal range.

Silkscreen	Name	Color	Status	Description
		Green	Blinking	The power module is in an input undervoltage or input overvoltage condition.
OUTPUT	OUTPUT indicator	-	Steady off	The power module provides no output power.
		Green	Steady on	The output power of the power module is in the normal range.
ALARM	ALARM indicator	-	Steady off	The power module is working normally.
		Red	Steady on	The power module is experiencing overheating, external short circuit, output overvoltage, output overcurrent, or a fan failure.
		Red	Blinking	Communicati on between the power module and CMU has been interrupted.

Functions and Features

A 3000 W AC power module provides a maximum power of 3000 W for the chassis. **Table 5-45** describes the functions of a 3000 W AC power module.

Table 5-45 Functions of a 3000 W AC power module

Function		Description
Input protection	Input overvoltage protection	In this protection state, the power module is turned off and stops supplying power. When the system recovers from input overvoltage, the power module can automatically start supplying power again.
	Input undervoltage protection	In this protection state, the power module is turned off and stops supplying power. When the system recovers from input undervoltage, the power module can automatically start supplying power again.
	Input overcurrent protection	In this protection state, the power module is turned off and stops supplying power. The power module cannot automatically start supplying power again and needs to be replaced.
Output protection	Output overvoltage protection	 In this protection state: If output overvoltage is caused by the power module itself, the power module stops supplying power. When the system recovers from output overvoltage, the power module cannot automatically start supplying power again. If output overvoltage is caused by increase of the input voltage received from the external power source, the power module stops supplying power. When the system recovers from output overvoltage, the
	Output overcurrent protection	power module can automatically start supplying power again. In this protection state, the output current is limited to a certain value. When the system recovers from output overcurrent, the power module can automatically start supplying power again.
	Output short- circuit protection	In this protection state, the power module supplies power intermittently, and the output current is limited to a range. When the system recovers from output short-circuit, the power module can automatically start supplying power again.

Function	Description
Overtemperature protection	When the temperature of the power module exceeds a specified threshold, the power module stops supplying power. When the temperature falls into the normal range, the power module automatically resumes power supply.
Hot swapping	The power module is hot swappable.

□ NOTE

Do not insert the power cable locking strap into an air vent on the power module panel, as this will affect operations of the power module.

When the power module is used in the following chassis, its maximum output power is 2200 W:

- S7703 chassis running a version between V200R002C00 and V200R011C10 (used in a system power slot)
- S7703 chassis running a version between V100R006C00 and V200R011C10 (used in the PoE power slot)
- S7706 chassis running a version between V200R002C00 and V200R011C10 (used in a system power slot)
- S7706 chassis running a version between V100R006C00 and V200R011C10 (used in a PoE power slot)
- S7712 chassis running a version between V200R002C00 and V200R011C10 (used in a system power slot)
- S7712 chassis running a version between V100R006C00 and V200R011C10 (used in a PoE power slot)

Technical Specifications

Table 5-46 Technical specifications of the PAC3KS54-NE

Item	Specification
Dimensions without packaging (H x W x D) [mm(in.)]	130 mm x 41 mm x 417.4 mm (5.1 in. x 1.6 in. x 16.4 in.)
Weight without packaging [kg(lb)]	< 3 kg
Number of inputs	1
Rated input voltage [V]	220 V AC/110 V AC; 50/60 Hz 240 V DC

Item	Specification
Input voltage range [V]	90 V AC to 290 V AC; 47 Hz to 63 Hz 190 V DC to 290 V DC
	The maximum current of the power cable used by the 3000 W AC power module is 16 A. When the 220 V input is used, the minimum voltage cannot be lower than 200 V. When the 110 V input is used, the minimum voltage cannot be lower than 100 V.
Maximum input current [A]	AC input: 16 A
	High-voltage DC input: 14 A
Rated output voltage [V]	53.5 V DC
Rated output current [A]	56.1 A (220 V AC input or 240 V DC)/ 28.1 A (110 V AC Input)
Rated output power [W]	3000 W (220 V AC input or 240 V DC)/ 1500 W (110 V AC input)
Power dissipation Mode	Heat dissipation with fan
Hot swapping	Supported

5.2 Power Distribution Box

5.2.1 1600 W DC Power Distribution Box

Figure 5-19 shows a 1600 W DC power distribution box.





A 1600 W DC power distribution box is C3 type and provides short-circuit protection and overload protection functions.

Table 5-47 lists specifications of a 1600 W DC power distribution box.


Table 5-47 Specifications of a 1600 W DC power distribution box

Item		Description
	Rated input voltage	-48 V DC/-60 V DC
	Input voltage range	-38.4 V DC to -72 V DC
	Input mode	Two DC inputs. By default, the two inputs are provided by different power sources. To use the same power source to provide two inputs, short circuit the two input terminals using two short-circuiting bars, as shown in Figure 5-20.
	Maximum input current	80 A per input
	Input terminal	M8 OT terminal
Output	Rated output voltage	-48 V DC to -60 V DC
	Output voltage	-38.4 V DC to -72 V DC
	Number of outputs	Eight outputs, controlled by four circuit breakers (Each circuit breaker controls two outputs.)
	Current of each circuit breaker	40 A
	Output protection	Overcurrent protection (Power supply needs to be restored manually once the power distribution box enters the overcurrent protection state.)
	Output terminal	Cord end terminal (12 AWG to 10 AWG)
Environme nt specificatio ns	Operating temperature	-25°C to +55°C (-13°F to + 131°F)
	Storage temperature	-40°C to +70°C (-40°F to 158°F)
	Relative humidity	≤ 95%

Item		Description
	Standard atmospheric pressure	70 kPa to 106 kPa
Dimensions	(H x W x D)	84.5 mm x 436 mm x 116 mm (3.3 in. x 17.2 in. x 4.6 in.)
Model		LEOW01DPDB (mounting brackets for 19-inch and 21-inch racks delivered by default)
Part number		02355416

Figure 5-20 shows power distribution in a 1600 W DC power distribution box.

Figure 5-20 Power distribution in a 1600 W DC power distribution box

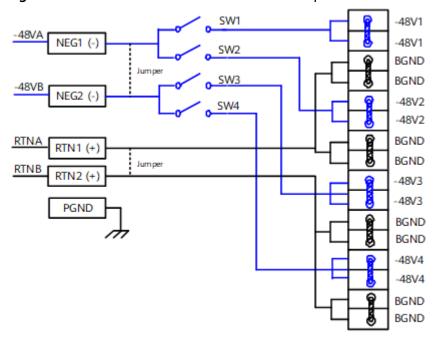

5.2.2 2200 W DC Power Distribution Box

Figure 5-21 shows a 2200 W DC power distribution box.


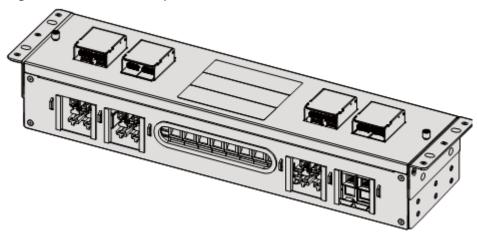


Figure 5-21 2200 W DC power distribution box

A 2200 W DC power distribution box can use -48 V two-way short-circuiting bars, each of which provides JG input terminals. A -48 V two-way short-circuiting bar allows a maximum of 120 A input current and converts one input into two outputs to circuit breakers. **Figure 5-22** shows a -48 V two-way short-circuiting bar.

Figure 5-22 -48 V two-way short-circuiting bar



A 2200 W DC power distribution box provides short-circuit protection and overload protection.

Table 5-48 lists specifications of a 2200 W DC power distribution box.

Table 5-48 Specifications of a 2200 W DC power distribution box

Item		Description
Input	Rated input voltage	-48 V DC/-60 V DC

Item		Description
	Input voltage	-38.4 V DC to -72 V DC
	Input mode	Eight DC inputs by default (Short-circuiting bars can convert the eight inputs into four.)
	Maximum input current	60 A per input (120 A per input when short-circuiting bars are used)
	Input terminal	Cord end terminal, allowing power cables with a maximum of 35 mm ² diameter (When short-circuiting bars are used, M6 OT terminals are used for -48 V input and cord end terminals are used for RTN input.)
Output	Rated output voltage	-48 V DC to -60 V DC
	Output voltage	-38.4 V DC to -72 V DC
	Number of outputs	Eight
	Current of each circuit breaker	63 A
	Output protection	Overcurrent protection (Power supply needs to be restored manually once the power distribution box enters the overcurrent protection state.)
	Output terminal	Cord end terminal, allowing power cables with a maximum of 35 mm ² diameter
Environ ment	Operating temperature	-25°C to +55°C (-13°F to +131°F)
specificat ions	Storage temperature	-40°C to +70°C (-40°F to +158°F)
	Relative humidity	≤ 95%
	Standard atmospheric pressure	70 kPa to 106 kPa
Dimensions (H x W x D)		110 mm x 442 mm x 89.2 mm (4.33 in. x 17.40 in. x 3.51 in.)
Model		EH1M00PDBS01
Part number		02355419

Figure 5-23 and **Figure 5-24** show power distribution in a 2200 W DC power distribution box.

Figure 5-23 Power distribution in a 2200 W DC power distribution box (eight inputs and eight outputs)


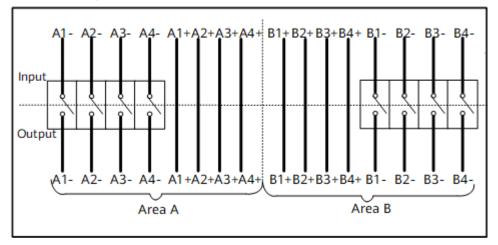


Figure 5-24 Power distribution in a 2200 W DC power distribution box (four inputs and eight outputs)

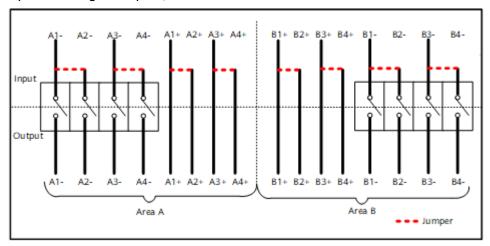

5.2.3 800 W AC Power Distribution Box

Figure 5-25 shows an 800 W AC power distribution box.



Figure 5-25 800 W AC power distribution box

An 800 W AC power distribution box can convert one power input into eight power outputs, and it provides short-circuit protection and overload protection.

Table 5-49 lists specifications of an 800 W AC power distribution box.


Table 5-49 Specifications of an 800 W AC power distribution box

Item		Description
Input	Input voltage	Rated voltage: 100 V AC to 240 V AC Operating voltage: 90 V AC to 276 V AC
	Input terminal	Cord end terminal (applicable to 0.75-25 mm ² power cables)
Output	Output voltage	Rated voltage: 100 V AC to 240 V AC Operating voltage: 90 V AC to 276 V AC
	Number of outputs	Eight outputs controlled by eight circuit breakers
	Current of each circuit breaker	10 A
	Output protection	Overcurrent protection (Power supply needs to be restored manually once the power distribution box enters the overcurrent protection state.)
	Output terminal	Cord end terminal (applicable to 1.0 mm ² cables)

Item		Description
Environm ent specificat ions	Operating temperature	-25°C to +55°C (-13°F to +131°F)
	Storage temperature	-40°C to +70°C (-40°F to +158°F)
	Relative humidity	≤ 95%
	Standard atmospheric pressure	70 kPa to 106 kPa
Dimensions (H x W x D)		133 mm x 383 mm x 94.5 mm (5.2 in. x 15.1 in. x 3.7 in.)
Model		IN6W18L10A
Part number		02355417

Figure 5-26 shows power distribution in an 800 W AC power distribution box.

Figure 5-26 Power distribution in an 800 W AC power distribution box



5.2.4 2200 W AC Power Distribution Box

Figure 5-27 shows a 2200 W AC power distribution box.

(C) OF THE STATE O

Figure 5-27 2200 W AC power distribution box

A 2200 W AC power distribution box provides short-circuit protection and overload protection.

Table 5-50 lists specifications of a 2200 W AC power distribution box.

Table 5-50 Specifications of a 2200 W AC power distribution box

Item		Description
Input	Input voltage	Rated voltage: 100 V AC to 240 V AC Operating voltage: 90 V AC to 276 V AC
	Input mode	Typical application: two AC inputs (1+1). The delivered terminal block has two AC input terminals (1+1) by default.
		Three AC inputs (2+1)
		Four AC inputs (2+2)
	Maximum input current	Two AC inputs (1+1): 32 A + 32 A (maximum)
		Three AC inputs (2+1): 16 A x 2 + 32 A (maximum)
		Four AC inputs (2+2): 16 A x 4 (maximum)
	Frequency	50/60±3 Hz
Output	Output voltage	Rated voltage: 100 V AC to 240 V AC Operating voltage: 90 V AC to 276 V AC
	Number of outputs	Four outputs, with short-circuit protection function
	Current of each output	16 A (maximum)

Item		Description
	Output protection	Overcurrent protection and short-circuit protection (Power supply needs to be restored manually once the power distribution box enters a protection state.)
Environmen t specificatio ns	Operating temperature	0°C to 45°C (32°F to 113°F)
	Storage temperature	-40°C to +70°C (-40°F to +158°F)
	Relative humidity	5% to 95%
	Altitude	-60 m to +3000 m (-197 ft. to +9483 ft.)
Safety standards compliance		EN60950-1, IEC60950-1
Environmental standards compliance		RoHS, WEEE, Huawei regulation on the 13 hazardous substances
Dimensions (H x W x D)		133 mm x 436 mm x 94.5 mm (5.2 in. x 17.2 in. x 3.7 in.)
Color		NC purple gray
Model		IM1W24APD
Part number		02355418

Figure 5-28, **Figure 5-29**, and **Figure 5-30** show power distribution in a 2200 W AC power distribution box.

□ NOTE

If a 2200 W AC power distribution box is connected to one or two 2200 W AC power modules, only OUTPUT A or OUTPUT B is used. In this case, only one input is required.

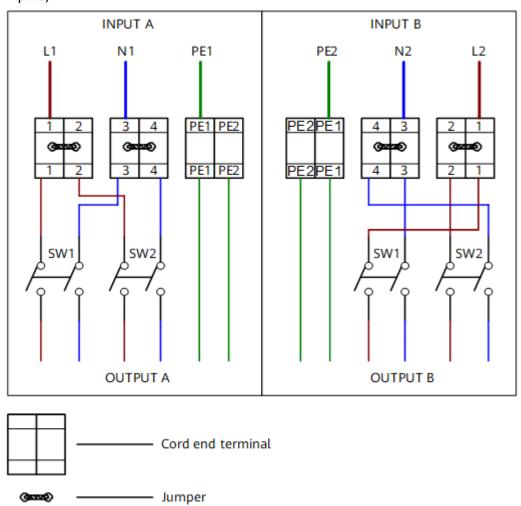


Figure 5-28 Power distribution in a 2200 W AC power distribution box (two inputs)

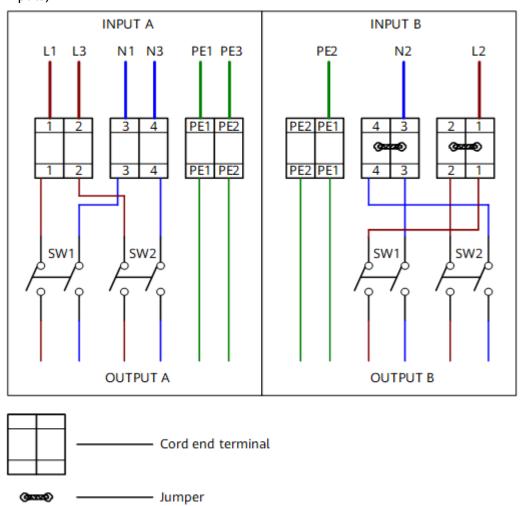


Figure 5-29 Power distribution in a 2200 W AC power distribution box (three inputs)

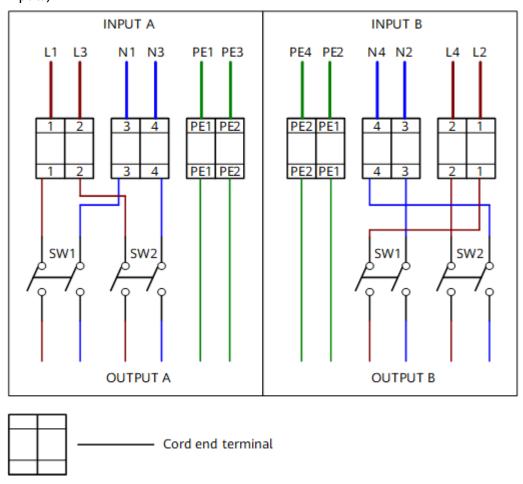


Figure 5-30 Power distribution in a 2200 W AC power distribution box (four inputs)