


DS-1LN5EUEC0

U/UTP Cat5E PVC 25AWG Cable

Key Feature

- Stable electrical performance, compliant with ANSI/TIA-568.2-D, IEC61156, ISO/IEC11801.
- Compliant with RoHS 2.0.
- Sheath with strong mechanical properties, and high tensile and compressive strength, reducing damage during the project.
- Excellent performance in the Fluke 80-meter permanent link test while working continuously at 50°C high temperature.
- Excellent performance in the Fluke 90-meter channel test.
- Solid-Bare Copper conductor with less resistance, and better electrical properties and transmission performance.

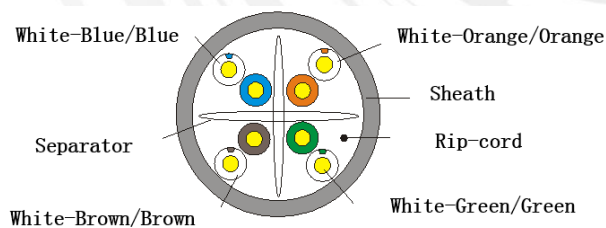

Specification

Model		DS-1LN5EUEC0	
Category	Cat.5E		
Reference standard	ISO/IEC11801, ANSI/TIA-568.2-D, RoHS 2.0		
Fire resistance	No		
Conductor	Material	Solid-Bare Copper (99.95%)	
	Diameter	0.45 ± 0.01 mm 25AWG	
Insulation	Material	HDPE	
	Diameter	0.82 ± 0.05 mm	
Sheath	Thickness	0.50 ± 0.05 mm	
	Diameter	4.70 ± 0.50 mm	
	Material	PVC	
	Color	Grey	
Rip-cord	Yes		
Separator	No		
Sheath physical properties	Before aging	Tensile strength ≥ 13.5 Mpa Elongation ≥ 150%	
	Aging period	100°C × 24h × 10d	
	After aging	Tensile strength ≥ 12.5 Mpa Elongation ≥ 125%	
	Cold bend	-20 ± 2°C × 4h, 8 × cable O.D, no visible cracks	
Electrical Characteristics (20°C)	1.0-100.0 MHz impedance	100 ± 15 Ω	
	1.0-100.0 MHz delay skew	≤ 45 ns/100 m	
	DC resistance	≤ 12 Ω/100 m	
	DC conductor resistance unbalance	≤ 4.0%	
	Package dimension	350 mm X 350 mm X200 mm	
	Weight	8.4 ± 0.5 kg	
	Cable length	(305 ± 1.5) m	
	Ambient temperature	-20°C to 70°C	
	Operating voltage	57 V	

Technical Performance (Fluke 90-meter channel)

Frequency (MHz)	Insertion Loss (dB)	NEXT (dB)	RL (dB)	ACR-N (dB)	ACR-F (dB)	PS NEXT (dB)	PS ACR-N (dB)	PS ACR-F (dB)
1	3.0	60.0	17.0	57.0	57.4	57.0	54.0	54.4
4	4.5	53.5	17.0	49.1	45.4	50.5	46.1	42.4
8	6.3	48.6	17.0	42.3	39.3	45.6	39.3	36.3
10	7.1	47.0	17.0	39.9	37.4	44.0	36.9	34.4
16	9.1	43.6	17.0	34.5	33.3	40.6	31.5	30.3
20	10.2	42.0	17.0	31.8	31.4	39.0	28.8	28.4
25	11.4	40.3	16.0	28.9	29.4	37.3	25.9	26.4
31.25	12.9	38.7	15.1	25.9	27.5	35.7	22.9	24.5
62.5	18.6	33.6	12.1	15.0	21.5	30.6	12.0	18.5
100	24.0	30.1	10.0	6.1	17.4	27.1	3.1	14.4

Available Model

DS-1LN5EUECO

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq