

DS-D5022F2-2P2 22 inch FHD IPS 100 Hz Monitor



- 100 Hz refresh rate, more fluid and life-like video
- IPS technology for wide, 178° ultra-wide view screen.
- Ultra-thin device body with ultra-thin border for 3 sides.
- 8 bit LVDS FHD (1920 × 1080) display.
- 3D noise reduction.
- Low blue light design for eye care.
- Dual interface of HDMI and VGA.
- Support VESA wall mount.

▪ Specification

Model		DS-D5022F2-2P2
Display	Screen Size	21.45 inch
	Active Display Area	478.656 (H) mm × 260.280 (V) mm
	Resolution	1920 × 1080
	Backlight	E-LED
	Pixel Pitch	0.241 (H) mm × 0.241 (V) mm
	Brightness	250 cd/m ²
	Viewing Angle	178° (H)/178° (V)
	Color Depth	8 bit, 16.7 M
	Contrast Ratio	1000:1
	Response Time	6.5 ms
	Refresh Rate	Typ 60 Hz, Max 100 Hz
	Haze	Haze 25%, 3H
	Reliability	7 × 16 H
	Color Gamut	72% NTSC
Interface	Video & Audio Input	HDMI 1.4 × 1, VGA × 1
Power	Power Supply	DC 12V, 2.0A
	Power Consumption	≤ 24 W
	Standby Consumption	≤ 0.5 W
General	Casing Material	Plastic
	VESA	75 mm × 75 mm (4 - M4 × 6 mm)
	Bezel Width	2.38 mm (top/left/right), 21.55 mm (bottom)
	Product Dimensions (W × H × D)	With base: 493.26 (W) mm × 367.02 (H) mm × 162.73(D) mm (19.42" × 14.45" × 6.41") Without base: 493.26 (W) mm × 290.13 (H) mm × 42.35 (D) mm (19.42" × 11.42" × 1.67")
	Package Dimensions (W × H × D)	599 (W) mm × 393 (H) mm × 109 (D) mm (23.58" × 15.47" × 4.29")
	Net Weight	2.0 ± 0.5 kg (4.41 ± 1.10 lb.)
	Gross Weight	3.1 ± 0.5 kg (6.83 ± 1.10 lb.)
	Packing List	Monitor × 1, Base component × 1, Power adapter (12 V, 2.0 A) × 1, HDMI cable (1.5 m) × 1, User manual × 1, Multilingual manual × 1
Remarks	The base is included by default. The product appearance and parameters in this specification may vary from your actual device. Please consult our local sales staff for further information	
Working Environment	Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
	Working Humidity	20% RH to 90% RH (Non-Condensing)
	Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
	Storage Humidity	10% RH to 90% RH (Non-Condensing)

▪ **Physical Interface**

Interface	Description	Interface	Description
HDMI	HDMI 1.4 digital signal input interface	VGA	VGA analog signal input interface
DC	DC 12 V 2.0 A input interface		

HDMI


VGA

DC

▪ **Available Model**

DS-D5022F2-2P2

▪ **Dimension**

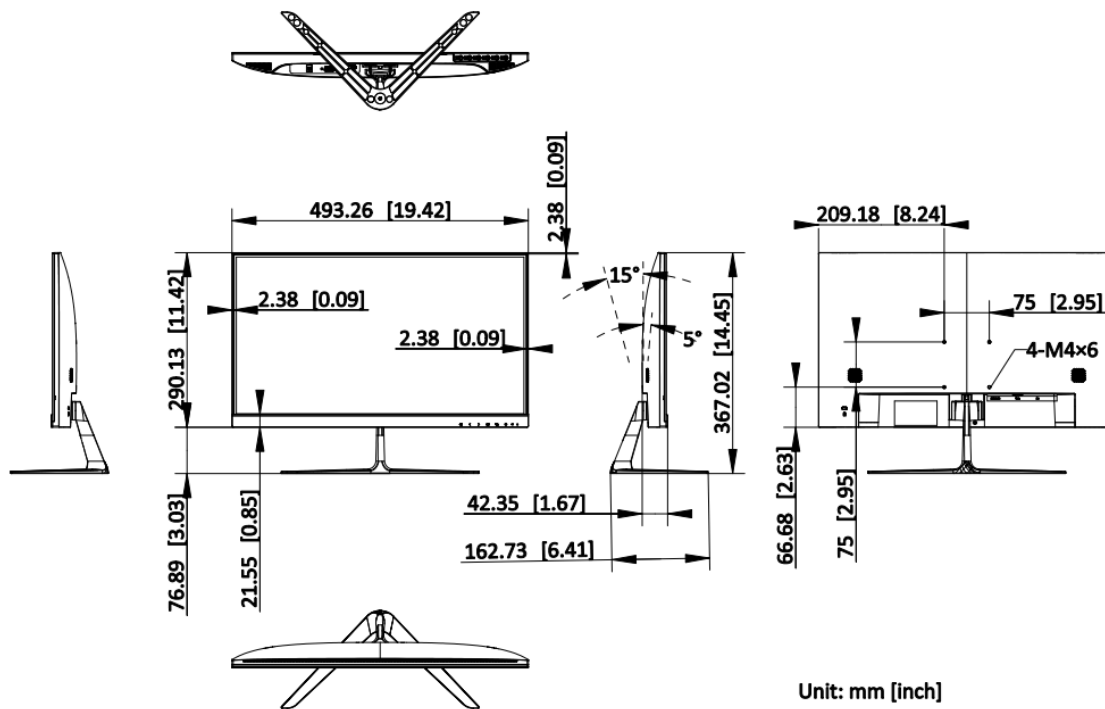

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

