

DS-K1104Mx Series

Vandal-Resistant Card Reader

- LED Reader Status Indicator
- Tamper-Resistant Alarm
- Supports M1 Cards
- Keypad (Option)
- RS-485 and Wiegand (W26/W34) Protocols

Hikvision's DS-K1104 Series vandal-resistant card readers with DIP switch are rated IK10. They support RS-485 and Wiegand (W26/W34) protocols. Contains a built-in M1 13.56 MHz card reading module. Meets ISO 14443-A standards.

Available Models: DS-K1104M: M1 card reader
DS-K1104MK: M1 card reader w/keypad



DS-K1104M




DS-K1104MK


Specifications

	DS-K1104M	DS-K1104MK
Power Supply	12 VDC	
Working Current	□ 500 mA	
Processor	32-bit	
Reading Frequency	13.56 MHz	
Reading Range	□ 1.97" (≤ 50 mm)	
ID Settings	DIP switch	
Audio Alert	Beeper	
Power Consumption	□ 2 W	
Keypad	No keypad	Keypad w/12 keys (0 to 9, *, #)
Certifications	CE, FCC, UL 60950-1	
LED Indicator	Power indicator; status LED indicator	
Working Temperature	-4° to +149° F (-20° to +65° C)	
Working Humidity	10% to 90% (non-condensing)	
Protection Level	IP 65	
Dimensions	4.65" x 2.99" x 0.91" (118 mm x 76 mm x 23 mm)	
Weight	□ 18.34 oz (≤ 0.52 kg)	
Installation Method	Standard U.S. single gang box	

Dimensions (Units: mm)

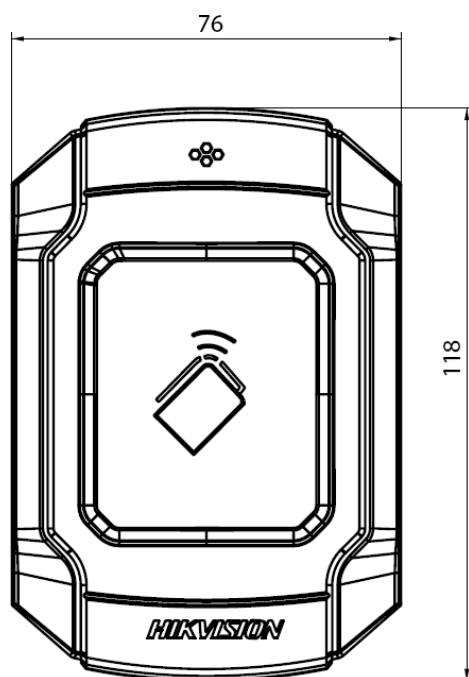

DS-K1104M

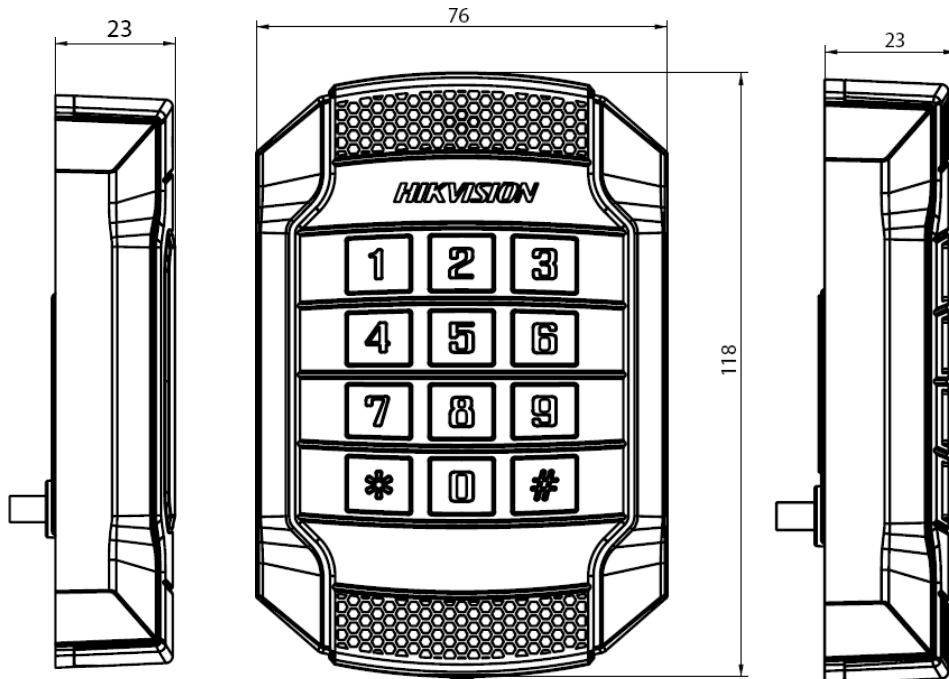

DS-K1104MK