

DS-K3G301X **Value Tripod Turnstile**



By adopting the turnstile integrated with the access control system, person should authenticate to pass through the lane via presenting cards, face, or QR code, etc. It is widely used in attractions, office, construction sites, residences, etc.

- Bidirectional (Entering/Exiting) lane.
- Fire alarm passing: When triggered, the arms will be dropped automatically for emergency evacuation.
- High-brightness LED indicates the entrance/exit and passing status except "Pg" models.

▪ Specification


System	
Motor	NA
MCBF	≥ 2 million times
Network	
Wired network	10/100 Mbps self-adaptive Ethernet
Interface	
Network interface	1
Lock control	2
Exit button	4
Alarm output	2
TAMPER	NA
RS-485	4
RS-232	2
Wiegand	2
Fire alarm input	1
Case input	2
Hardware	
Access controller	Supplied
Capacity	
Card capacity	500,000
Event capacity	500,000
Function	
Configuration via PC Web	Support
Configuration via mobile Web	Support
Audio prompt	Support
Communication protocol	TCP/IP
Keypad configuration	Support
Keyfob	Support, 433 MHz/868 MHz, within 35 m
General	
Throughput	25 to 60 persons per minute The actual throughput is affected by the person passing rate and passing method.
Lane width	550 mm (21.65")
Barrier material	SUS304 stainless pipe
Pedestal material	SUS304 stainless steel 1.0 mm and SUS304 stainless steel 0.8 mm
Power consumption	Standby: 35 W Working: 45 W Peak: 55 W
Working temperature	-20 °C to 65 °C (-4 °F to 149 °F)
Working humidity	0% to 95% (No condensing)
Protective level	IPX4
Dimensions	Without package: 1200 mm × 233 mm × 1000 mm (47.2" × 9.2" × 39.4") With package: 1350 mm × 410 mm × 1120 mm (53.1" × 16.1" × 44.1")
Weight	Net: 30.58 kg (. lb); Gross: 37.8 kg (. lb)

Approval	CE/CB/RoHS/REACH/WEEE
Power supply method	Power supply: 100 to 120 VAC~ / 200 to 240 VAC~, 50/60 Hz, 0.5 A to 1 A Adapter: 100 to 240 VAC~, 50/60 Hz, 0.5 A to 1 A
Configuration	
Module selection	NO

▪ Available Model

DS-K3G301X

▪ Dimension

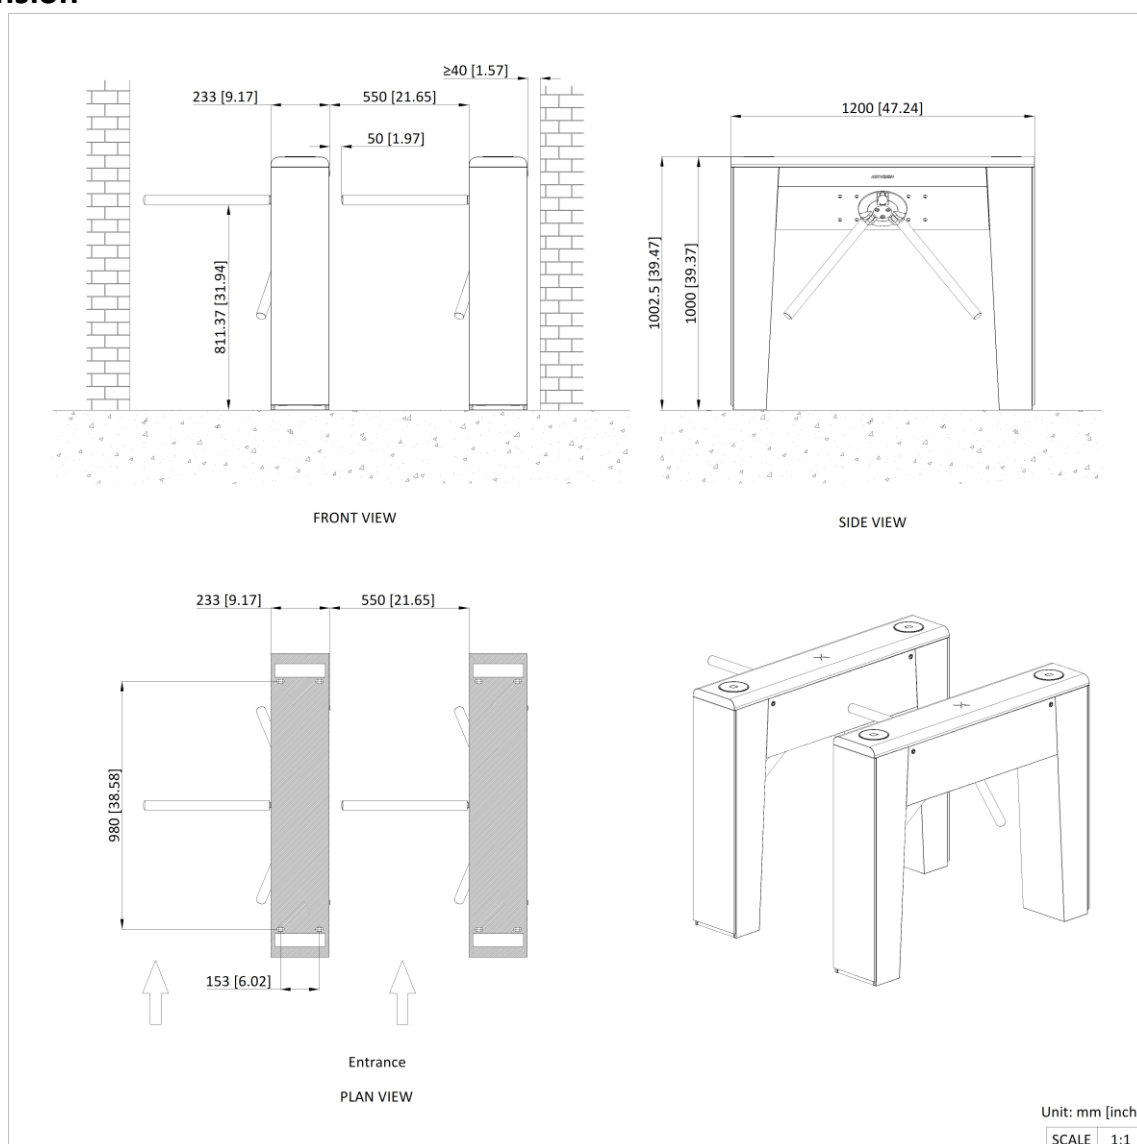

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq