

ViewSonic® COMMERCIAL DISPLAY

CDE5530


Key Features

- Wireless presentation for enhanced efficiency
- Single USB-C cable for 65W power delivery
- 24/7 video playback for continuous communication
- Remote device management with myViewBoard Manager
- ProAV compatibility with Crestron, Extron, and AMX



Product Description

With stunning 4K Ultra HD resolution, high brightness, and landscape and portrait modes, the CDE30 Series offers continuous and sustainable 24/7 display for both corporate and campus communication. For ease of use, the display is equipped with a Quad Core SoC to run multiple operations seamlessly, and its USB-C one-cable solution sorts for effortless connection with external devices. Designed for easy multimedia playback, the CDE30 Series offers cable-free screen casting and screen sharing through myViewBoard Display and vCast, which also supports Airplay and Chromecast. Remote management vManager makes changing content, broadcasting, and software updates a breeze. Available in six sizes ranging from 43" to 98", the CDE30 Series features HDMI input and output for seamless tiling of up to 16 communication needs of any campus, corporate, or retail space.

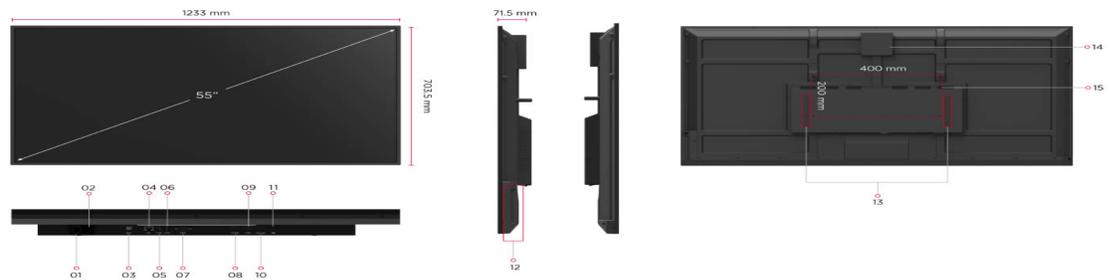

1. Power Switch
2. AC IN
3. SPDIF
4. LAN
5. USB 2.0
6. USB 3.0
7. RS-232

8. HDMI OUT
9. HDMI 2
10. HDMI (ARC)
11. USB-C
12. Control Panel
13. Speaker
14. WiFi Slot

15. VESA® Wall Mount (400x200mm)

Visit Us www.viewsonic.com

DISPLAY

Panel Size:	55"
Type/ Tech:	TFT LCD Module. VA type, DLED backlight
Display Area (mm):	1209.6 (H) x 680.4 (V) (54.64" diagonal)
Native Resolution:	3840 x 2160
Aspect Ratio:	16:9
Colors:	1.07G (8bits + FRC-)
Brightness:	450 nits (typ.)
Contrast Ratio:	1200:1 (typ.), 5000:1 (DCR enabled)
Response Time:	6.5ms
Viewing Angles:	H = 178, V = 178 typ.
Backlight Life:	50,000 hours
Surface Treatment:	Anti-Glaire, 3H hardness, Haze 25%
Bezel:	9.9/9.9/9.9/9.9 mm (L/R/T/B)
Orientation:	Landscape & Portrait

PLATFORM

Processor:	Quad-core ARM Cortex A55
RAM:	4GB
Storage:	32GB

INPUT

HDMI:	2.1x2 (3840x2160 @60Hz, HDMI 1 supports ARC)
RS-232:	x 1
WiFi Slot:	x 1

OUTPUT

HDMI:	2.0 x1 (3840x2160 @60Hz)
SPDIF:	x 1

LAN

RJ45:	x 1
-------	-----

USB

Type A:	2.0 x 1, 3.0 x 1
Type C:	x1 (DP1.2, PD 65W, USB2.0, 100M ethernet)

SPEAKERS

10W x2	
--------	--

EMBEDDED OS

Android 11	
------------	--

POWER

Voltage:	100-240 VAC +/- 10%
Consumption:	82 W(typ.) < 0.5W(off)

OPERATING CONDITIONS

Temperature (° C):	0 to 40°C
Humidity:	10%-90% RH

OPERATING HOURS

7/24	
------	--

DIMENSIONS (W X H X D)

Physical (inch / mm):	48.54 x 27.70 x 2.81in/ 1233 x 703.5
Packaging (inch / mm):	52.44 x 32.24 x 6.14 in./1332 x 819 x

WEIGHT

Net (lb / kg):	29.54 lbs/13.4 kg
Gross (lb / kg):	42.99 lbs/19.5 kg

REGULATIONS

cTUVus, FCC/ICES003, Energy star 8.0, EPEAT, Mexico NOM , Mexico E Green BOM, RoHS , ErP, REACH, SCIP, WEEE , Annex I, Annex II, TPC

PACKAGE CONTENTS

1. Remote Control with batteries
2. Quick Start Guide
3. Power Cables
4. HDMI cable
5. USB-C cable
6. Wall Mount Screw x 4
7. RS232 adapter
8. Compliance statement