

DS-K5032-D Visitor Terminal



The visitor terminal is designed for visitor management, which is mainly applied to enterprises, stations, university campuses, factories, etc.

- Android operation system with dual-screen design.
- Paperless visitor enrollment.
- Supports both stand-alone and networking application. TCP/IP and Wi-Fi are available for networking application.
- Up to 150,000 visitor records can be stored on the device.

▪ Specification

System	
Operation system	Android 7.1.2
Display	
Size	For administrator and visitor: 10.1-inch
Resolution	1280 × 800
Operation method	For administrator: LCD touch screen For visitor: display screen
Video	
Pixel	2 MP
Lens	2
WDR	Support
Audio	
Audio output	Built-in loudspeaker
Network	
Wired network	Support
Wi-Fi	Support, 2.4 G
Interface	
Network interface	
Power interface	Round
USB	
Capacity	
Visitor record	150,000
Authentication	
Card type	M1 card
Card reading frequency	13.56 MHz
Card reading distance	0 to 4 cm
Card reading duration	< 1 s
General	
Indicator	Red/green indicator
Power supply	12 VDC, 3 A
Working temperature	-10 °C to 50 °C (14 °F to 122 °F)
Working humidity	10% to 90% (no condensing)

▪ Available Model

DS-K5032-D

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global




Hikvision
Corporate Channel



hikvisionhq

▪ **Dimension**

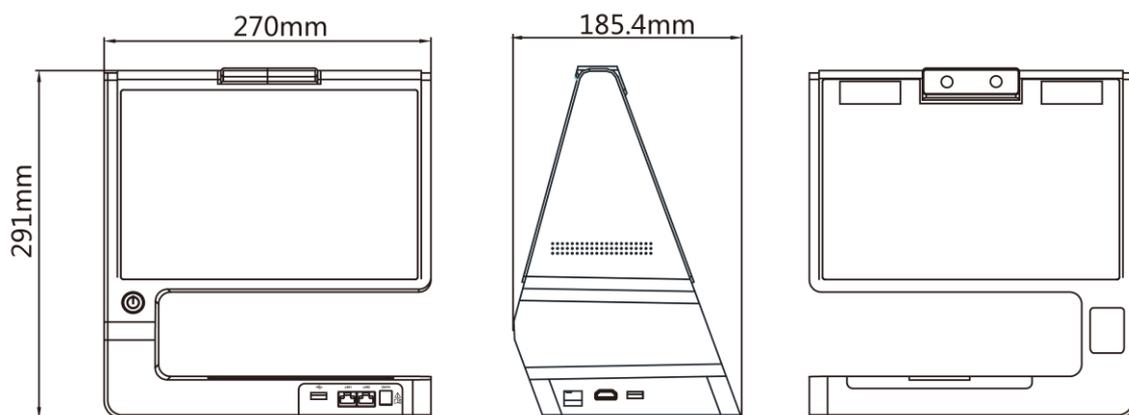

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq