

# Everon® LAN1 Fibre Housing Front panel loaded with LC Duplex Shuttered adapters and pigtails, 24 Fibres, 1U, Multimode OM3/OM4, universal splice pack, protectors not included, black

CORNING

**Part Number:**  
**LAN1-24AD-PGTL-B**

The LANscape® housing family was designed for various applications in 19-racks and main distribution frames. The fixed or sliding housings can be equipped with industry common adapter types in different fibre categories and are suitable for direct field termination, fusion splicing with pigtails as well as preterminated solutions. The four back openings accommodate cable glands. Additional brackets for cable strain relief for FTTH/FTTO applications or U-Clips for Plug & Play™ and EDGE™ trunks can be mounted at the backside.

The space-optimized interior makes it easy to work with ongoing moves, adds and changes (MACs), thus reducing the risk of network disruptions.

## Features and Benefits

### Easy to remove top cover

No tools needed

### Housing made of aluminium

Lightweight, but robust

### Quick-mount feature

Allows single-person mounting of housing

### Accomodate different termination methods


Pigtail splicing, field connectorisation, preterminated cables, Plug&Play™ or EDGE™ trunks can be installed in the same housing

### Low installation depth

Mountable in shallow cabinets or racks

### Multiple labelling options

Port numbering above and below adapter modules or customised labels

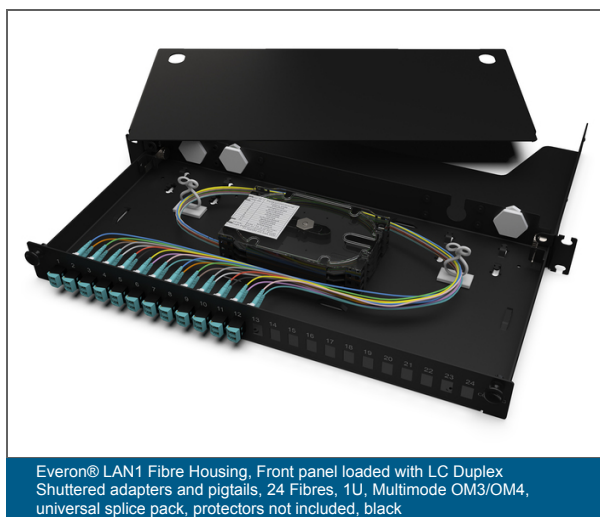

Everon® LAN1 Fibre Housing, Front panel loaded with LC Duplex Shuttered adapters and pigtails, 24 Fibres, 1U, Multimode OM3/OM4, universal splice pack, protectors not included, black

# Everon® LAN1 Fibre Housing Front panel loaded with LC Duplex Shuttered adapters and pigtails, 24 Fibres, 1U, Multimode OM3/OM4, universal splice pack, protectors not included, black

CORNING

## Specifications

### General Specifications

Fibre category	50 µm MM (OM3/OM4)
Access type	Front, top, rear
Lockable	No
Mounting Type	Rack 19"

### Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

### Environmental Conditions

Temperature range, installation	-10 °C to 60 °C
Temperature range, operation	-10 °C to 60 °C
Temperature range, storage	-10 °C to 60 °C

### Design

Fibre count	24
Splice tray type	Universal cassette with organisers for heat-shrink and crimp splice protectors
Housing material	Aluminum
Additional cable number reached w/accessories	4
Max. cable number in basic unit w/accessories	4
Cable entry type	Prepunched circular
Number of pigtails	24
Number of splice trays	2
Pigtail length	2 m
Adapter colour front	Turquoise
Adapter type front	LC PC duplex shuttered

**Everon® LAN1 Fibre Housing Front panel loaded with LC Duplex Shuttered adapters and pigtails, 24 Fibres, 1U, Multimode OM3/OM4, universal splice pack, protectors not included, black**

CORNING

### Design

Splice protectors type	Heat shrink, crimp
Number of adapters	12
Number of splice protectors	0
Total Splice Capacity	24 universal splices

### Design - Adapter

Adapter housing colour	Black
Adapter housing material	Aluminum
Keyed adapter	No
Shuttered adapter	Yes
Adapter type	LC PC duplex shuttered

### Specifications - Connector A

Connector type	LC PC
Polish	PC
Insertion loss, max.	0.25 dB

### Specifications - Connector B

Polish	PC
--------	----

### Dimensions

Height	44 mm
Width	483 mm
Depth	233 mm

# Everon® LAN1 Fibre Housing Front panel loaded with LC Duplex Shuttered adapters and pigtails, 24 Fibres, 1U, Multimode OM3/OM4, universal splice pack, protectors not included, black

CORNING

## Ordering Information

Product Number	LAN1-24AD-PGTL-B
Package contents	LANscape Fiber Housing with adapters, splice packs including colored pigtails, 1x M20 cable gland and basic accessories
Height Unit	1 U
Units per delivery	1/1
Shipping Height	55 mm
Shipping Width	532 mm
Shipping Depth	350 mm



Corning Optical Communications GmbH & Co. KG • Leipziger Strasse 121 • 10117 Berlin, Germany  
+00 800 2675 4641 • FAX: • [www.corning.com/opcomm/emea](http://www.corning.com/opcomm/emea)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/emea/trademarks](http://www.corning.com/opcomm/emea/trademarks). Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2025 Corning Optical Communications. All rights reserved.